

8784

ImagePro 8784 Portable LCD Projector



The ImagePro 8784 is a light (4.1 lbs), networkable/wireless portable projector ideal for classroom or conference room.

8784 FEATURES

- 2000 Lumens Brightness
- XGA Resolution
- 3 Polysilicon Active-Matrix LCDS
- Network functionality
- Wireless connectivity
- Security Transition Detector
- Vertical Keystone correction +/-30°
- Easy to transport, only 4.1 lbs.
- Remote mouse control
- Blackboard and Whiteboard mode

Wireless 802.11 b/g operation via an included SD card or network connection via a RJ-45 port

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit www.convasystems.com.

Call Dukane: 800-676-2485

ImagePro 8784 Portable LCD projector

Back Panel Connections

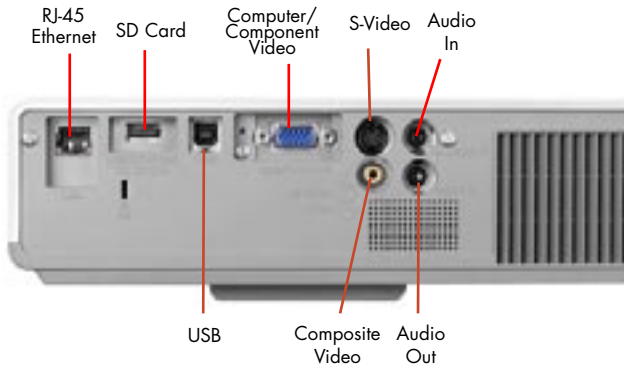

Key features:

- XGA (1024 x 768) resolution
- 2000 lumen brightness
- 3 Polysilicon Active-Matrix LCDs
- Wide angle lens
- Network/wireless connectivity
- PIN Security Transition Detector
- Vertical keystone correction +/- 30°
- Easy to transport, only 4.1 lbs.
- Remote mouse control
- Blackboard and whiteboard mode
- Five Year Warranty and One Year Peace of Mind Service

8784 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.5	3.0
60	48	5.1	6.1
80	64	6.8	8.1
100	80	8.5	10.2
120	96	10.2	12.3
150	120	12.8	15.3
200	160	17.0	20.4
300	240	25.5	30.7

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

ImagePro is a registered trademark of Dukane Corporation
#11700-L-06



toll-free
fax
e-mail

Specifications 8784

Image Element 0.63" polysilicon active-matrix TFT x3
 Brightness 2000 ANSI lumens
 (1600 lumens in Whisper Mode)
 Resolution 1024 x 768 pixels (H X V), XGA
 Contrast 500:1
 Scanning Frequency fh 15 -106 kHz, fv 50-120 Hz
 Lens Manual zoom (F1.7 – 1.9), 1.2X
 Lens Throw Ratio 1.3 –1.5:1 throw distance to
 image width
 Keystone Correction Digital, vertical +/-30 deg
 Aspect Ratio 4:3, 16:9 selectable
 Computer VGA, SVGA, XGA, SXGA, SXGA+,
 UXGA
 Compatibility Compressed PC and MAC13" and
 MAC16"
 Video Compatibility NTSC, NTSC4.43, PAL, SECAM,
 PAL-M, PAL-N,
 Component Video, HDTV (1080i, 720p, 576i, 480i)
 Image Control Freeze function, electronic
 magnification and pan
 Mouse Control Using USB
 Projection Modes Front/rear/ceiling
 Color Reproduction 24 bit (16.7 million)
 Lamp 160W UHB
 Lamp Life 2000 hours (typical) 3000 hours
 (whisper mode)
 Audio 1 speaker 1 watt
 Throw Distance 30" to 368"
 Screen Size, diagonal 30" to 300"
 Inputs, Video (1) Component, Shared on 15 pin D-Sub
 (1) S-video, Mini DIN 4-pin
 (1) Composite video, RCA x 1
 (1) RGB, 15 pin D-sub
 Inputs, Audio (1) Stereo mini jack
 Outputs, Audio (1) Stereo mini jack
 Outputs, Monitor RGB, 15 pin D-sub
 Outputs, Control USB Mouse control
 Other, Options SD Card, USB 2.0 Memory Reader
 Wireless Wireless 802.11 b/g
 Ethernet Ethernet RJ-45 port/100 Base T
 Security Kensington lock slot
 Fan Level 35dB, ultra quiet
 29dB in Whisper Mode
 Operating Temperature 41-95 deg F
 Power AC 100-120V, AC 220-240V
 50/60 Hz, 250 watt
 Size (WxHxD) 10.8" x 2.3" x 8.1"
 Weight 4.1 lbs.
 Shipping Weight 14 lbs.
 Carton Size 16" x 14" x 12"
 Accessories Included Remote control, batteries, power cord,
 RGB cable, SD Wireless Card,
 operators manual and soft carry case.
 Safety UL/C-UL, FCC Class B, CE
 Optional Accessories Lamp 456-8770
 Ceiling Mount, Universal; RPA-U

Five (5) year limited warranty on parts and labor
 in North America, lamp excluded (for other loca-
 tions, local warranties apply). Includes Dukane's
 FREE 1 year *Peace-of-Mind Loaner Program*.

5YR